


HPWC[®]
SINCE 2007



**CATALOGUE
SJT CABLE**

**TAKE TRUST
GIVE QUALITY**

HPWC[®]
SJT CABLE

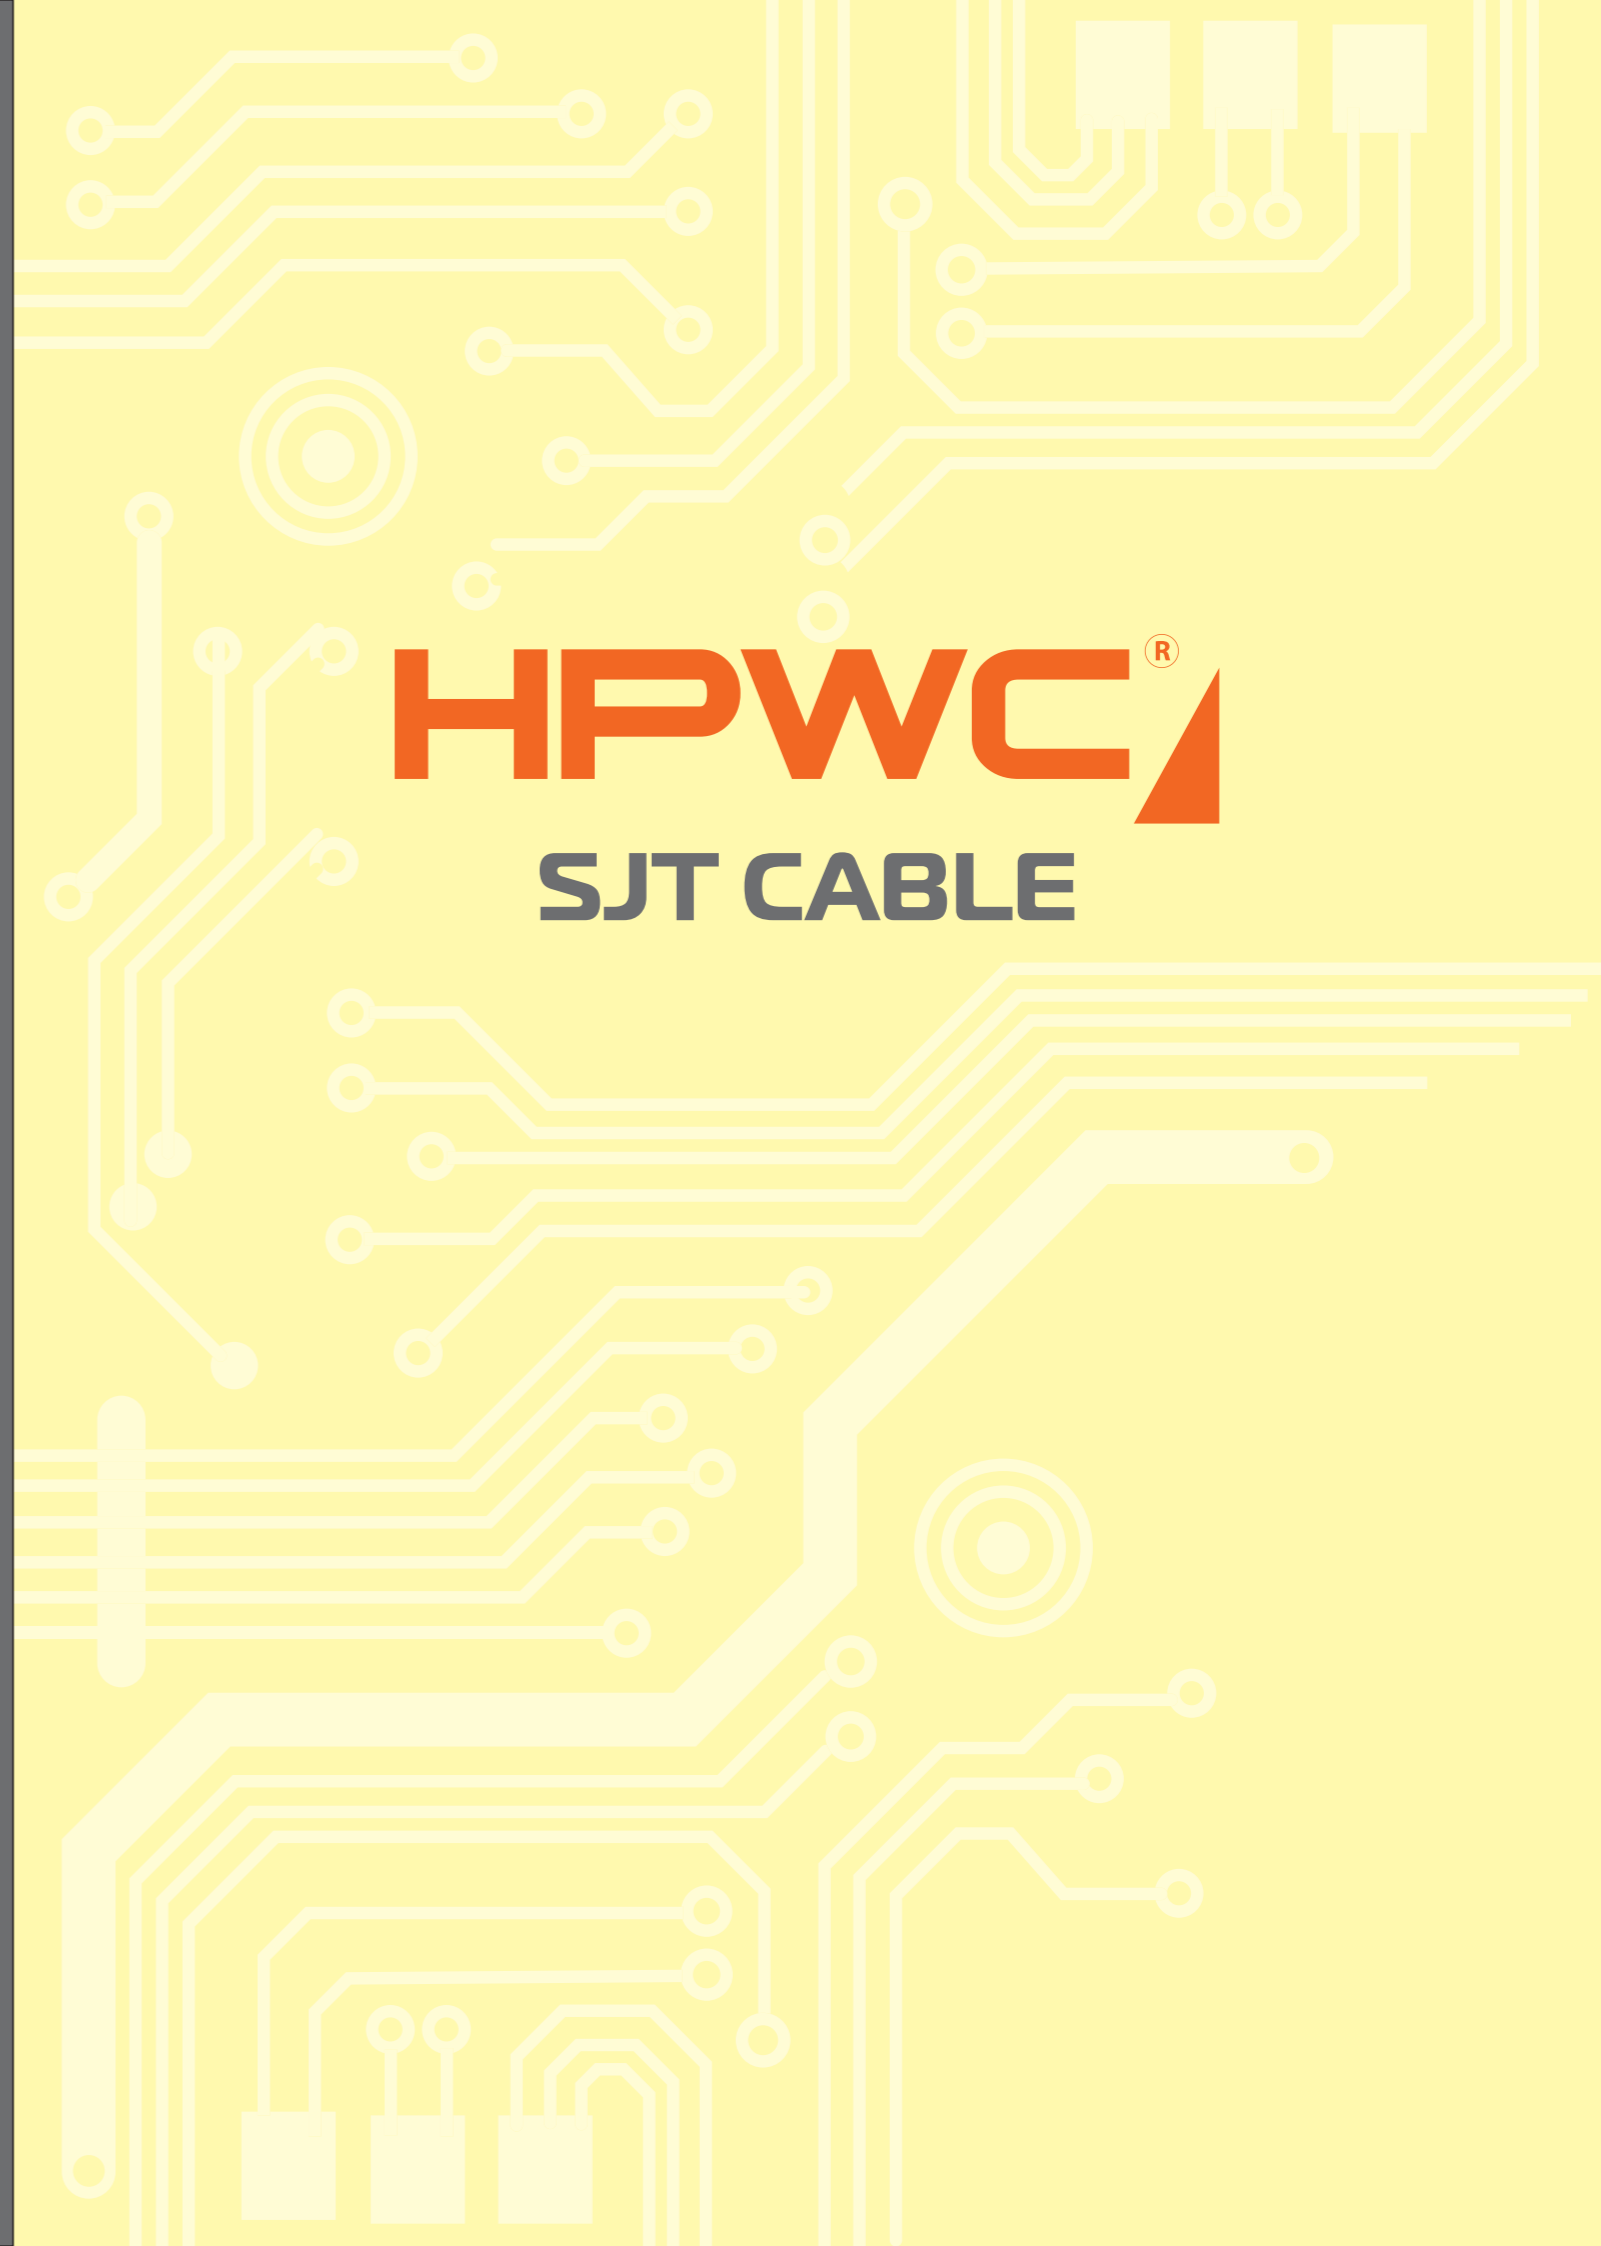

HPWC[®]

SJT 10/2

POWER CABLE & PORTABLE CORD



OVERVIEW

Our SJT 10/2 wire is part of our line of power cable and portable service cords. This 10 AWG, 30 AMPS, multi-conductor cable features 104/30 strands, polyvinyl chloride insulation, a PVC jacket, and an overall bare copper conductor material.

SHEATH COLOR



CHARACTERISTICS

It also has a temperature range of -34°C to 105°C, a voltage rating of 300V, 0.045 inches (1,143 mm) nominal insulation thickness, nominal outer diameter of 0.550 inches (13.97 mm) and weighs approximately 165 lbs (74.843 kg).

STANDARDS

UL-style SJTOOW standards



ATTRIBUTES

No. of Cond.	2
Amps	30
Approx	165.00 LBS/MFT (245.54 KG/M)
AWG Size	10
Color Code Chart	12
Cond. Material	Bare Copper
Conductor Stranding	104/30
CSA Type	Approved
Insul. Material	Polyvinylchloride (PVC)
Jacket Material	Polyvinylchloride (PVC)
Max. Temp	105C
Min. Temp	34C
No. of Strands	104
Nom. Insul. Thick.	0.045 inches (1.143 mm)
Nom. O.D. of Cable	0.550 inches (13.97 mm)
Strand Size	30
UL Style	SJTOOW

HPWC[®]

SJT 10/3

POWER CABLE & PORTABLE CORD



OVERVIEW

Our SJT 10/3 wire is part of our line of power cable and portable service cords. This 10 AWG, 30 AMPS, multi-conductor cable features 104/30 strands, polyvinyl chloride insulation, a PVC jacket, and an overall bare copper conductor material.

SHEATH COLOR



CHARACTERISTICS

It also has a temperature range of -34°C to 105°C, 0.045 inches (1,143 mm) nominal insulation thickness, nominal outer diameter of 0.580 inches (14.732 mm) and weighs approximately 215 lbs (97.522 kg).

STANDARDS

UL-style SJTOOW standards



ATTRIBUTES

No. of Cond.	3
Amps	30
Approx	215.00 LBS/MFT (319.95 KG/M)
AWG Size	10
Color Code Chart	12
Cond. Material	Bare Copper
Conductor Stranding	104/30
CSA Type	Approved
Insul. Material	Polyvinylchloride (PVC)
Jacket Material	Polyvinylchloride (PVC)
Max. Temp	105C
Min. Temp	-34C
No. of Strands	104
Nom. Insul. Thick.	0.045 inches (1.143 mm)
Nom. O.D. of Cable	0.580 inches (14.732 mm)
Strand Size	30
UL Style	SJTOOW

HPWC[®] SJT 10/4

POWER CABLE & PORTABLE CORD



OVERVIEW

Our SJT 10/4 wire is part of our line of power cable and portable service cords. This 10 AWG, 25 AMPS, multi-conductor cable features 104/30 strands, polyvinyl chloride insulation, a PVC jacket, and an overall bare copper conductor material.

SHEATH COLOR



STANDARDS

UL-style SJTOOW standards

ATTRIBUTES

No. of Cond.	4
Amps	25
Approx	275.00 LBS/MFT (409.24 KG/M)
AWG Size	10
Color Code Chart	12
Cond. Material	Bare Copper
Conductor Stranding	104/30
CSA Type	Approved
Insul. Material	Polyvinylchloride (PVC)
Jacket Material	Polyvinylchloride (PVC)
Max. Temp	105C
Min. Temp	-34C
No. of Strands	104
Nom. Insul. Thick.	0.045 inches (1.143 mm)
Nom. O.D. of Cable	0.640 inches (16.256 mm)
Strand Size	30
UL Style	SJTOOW

CHARACTERISTICS

It also has a temperature range of -34°C to 105°C, a voltage rating of 300V, 0.045 inches (1,143 mm) nominal insulation thickness, nominal outer diameter of 0.640 inches (16.256 mm) and weighs approximately 165 lbs (74.843 kg).



HPWC[®] SJT 12/2

POWER CABLE & PORTABLE CORD



OVERVIEW

Our SJT 12/2 wire is part of our line of power cable and portable service cords. This 12 AWG, 25 AMPS, multi-conductor cable features 65/30 strands, polyvinyl chloride insulation, a PVC jacket, and an overall bare copper conductor material.

SHEATH COLOR



STANDARDS

UL-style SJTOOW standards

ATTRIBUTES

No. of Cond.	2
Amps	25
Approx	100.00 LBS/MFT (148.81KG/M)
AWG Size	12
Color Code Chart	12
Cond. Material	Bare Copper
Conductor Stranding	65/30
CSA Type	Approved
Insul. Material	Polyvinylchloride (PVC)
Jacket Material	Polyvinylchloride (PVC)
Max. Temp	105C
Min. Temp	-34C
No. of Strands	65
Nom. Insul. Thick.	0.045 inches (1.143 mm)
Nom. O.D. of Cable	0.42 inches (10.668 mm)
Strand Size	30
UL Style	SJTOOW

CHARACTERISTICS

It also has a temperature range of -34°C to 105°C, a voltage rating of 300V, 0.045 inches (1,143 mm) nominal insulation thickness, nominal outer diameter of 0.420 inches (10.668mm) and weighs approximately 100 lbs (45.359 kg).



HPWC[®]

SJT 12/3

POWER CABLE & PORTABLE CORD



OVERVIEW

Our SJT 12/3 wire is part of our line of power cable and portable service cords. This 12 AWG, 25 AMPS, multi-conductor cable features 65/30 strands, polyvinyl chloride insulation, a PVC jacket, and an overall bare copper conductor material.

SHEATH COLOR



STANDARDS

UL-style SJTOOW standards

CHARACTERISTICS

It also has a temperature range of -34°C to 105°C, a voltage rating of 300V, 0.045 inches (1,143 mm) nominal insulation thickness, nominal outer diameter of 0.430 inches (10.922 mm) and weighs approximately 135 lbs (61.235 kg).



ATTRIBUTES

No. of Cond.	3
Amps	25
Approx	135.00 LBS/MFT (200.90 KG/M)
AWG Size	12
Color Code Chart	12
Cond. Material	Bare Copper
Conductor Stranding	65/30
CSA Type	Approved
Insul. Material	Polyvinylchloride (PVC)
Jacket Material	Polyvinylchloride (PVC)
Max. Temp	105C
Min. Temp	-34C
No. of Strands	65
Nom. Insul. Thick.	0.045 inches (1.143 mm)
Nom. O.D. of Cable	0.430 inches (10.922)
Strand Size	30
UL Style	SJTOOW
Voltage	300

HPWC[®]

SJT 12/4

POWER CABLE & PORTABLE CORD



OVERVIEW

Our SJT 12/4 wire is part of our line of power cable and portable service cords. This 12 AWG, 20 AMPS, multi-conductor cable features 65/30 strands, polyvinyl chloride insulation, a PVC jacket, and an overall bare copper conductor material.

SHEATH COLOR



STANDARDS

UL-style SJTOOW standards

CHARACTERISTICS

It also has a temperature range of -34°C to 105°C, 0.045 inches (1,143 mm) nominal insulation thickness, nominal outer diameter of 0.475 inches (12.065 mm) and weighs approximately 170 lbs (77.111 kg).



ATTRIBUTES

No. of Cond.	4
Amps	20
Approx	170.00 LBS/MFT (252.98 KG/M)
AWG Size	12
Color Code Chart	12
Cond. Material	Bare Copper
Conductor Stranding	65/30
CSA Type	Approved
Insul. Material	Polyvinylchloride (PVC)
Jacket Material	Polyvinylchloride (PVC)
Max. Temp	105C
Min. Temp	-34C
No. of Strands	65
Nom. Insul. Thick.	0.045 inches (1.143 mm)
Nom. O.D. of Cable	0.475 nches (12.065 mm)
Strand Size	30
UL Style	SJTOOW

HPWC[®]

SJT 14/2

POWER CABLE & PORTABLE CORD



OVERVIEW

Our SJT 14/2 wire is part of our line of power cable and portable service cords. This 14 AWG, 18 AMPS, multi-conductor cable features 41/30 strands, polyvinyl chloride insulation, a PVC jacket, and an overall bare copper conductor material.

SHEATH COLOR



CHARACTERISTICS

It also has a temperature range of -34°C to 105°C, 0.045 inches (1,143 mm) nominal insulation thickness, Nominal outer diameter of 0.345 inches (8.763 mm) weighs approximately 75 lbs (34.019 kg).

STANDARDS

UL-style SJTOOW standards



ATTRIBUTES

No. of Cond.	2
Amps	18
Approx	75.00 LBS/MFT (111.61 KG/M)
AWG Size	14
Color Code Chart	12
Cond. Material	Bare Copper
Conductor Stranding	41/30
CSA Type	Approved
Insul. Material	Polyvinylchloride (PVC)
Jacket Material	Polyvinylchloride (PVC)
Max. Temp	105C
Min. Temp	-34C
No. of Strands	41
Nom. Insul. Thick. (in)	0.045 inches (1.143 mm)
Nom. O.D. of Cable (in)	0.345 inches (8.763 mm)
Strand Size	30
UL Style	SJTOOW

HPWC[®]

SJT 14/3

POWER CABLE & PORTABLE CORD



OVERVIEW

Our SJT 14/3 wire is part of our line of power cable and portable service cords. This 14 AWG, 18 AMPS, multi-conductor cable features 41/30 strands, polyvinyl chloride insulation, a PVC jacket, and an overall bare copper conductor material.

SHEATH COLOR



CHARACTERISTICS

It also has a temperature range of -34°C to 105°C, 0.045 inches (1,143 mm) nominal insulation thickness, nominal outer diameter of 0.365 inches (9.271 mm) weighs approximately 75 lbs (34.019 kg).

STANDARDS

UL-style SJTOOW standards



ATTRIBUTES

No. of Cond.	3
Amps	18
Approx	0.00 LBS/MFT (0.00 KG/M)
AWG Size	14
Color Code Chart	12
Cond. Material	Bare Copper
Conductor Stranding	41/30
CSA Type	Approved
Insul. Material	Polyvinylchloride (PVC)
Jacket Material	Polyvinylchloride (PVC)
Max. Temp	105C
Min. Temp	-34C
No. of Strands	41
Nom. Insul. Thick.	0.045 inches (1.143 mm)
Nom. O.D. of Cable	0.365 inches (9.271 mm)
Strand Size	30
UL Style	SJTOOW
Voltage	300

HPWC[®]

SJT 14/4

POWER CABLE & PORTABLE CORD



OVERVIEW

Our SJT 14/4 wire is part of our line of power cable and portable service cords. This 14 AWG, 15 AMPS, multi-conductor cable features 41/30 strands, polyvinyl chloride insulation, a PVC jacket, and an overall bare copper conductor material.

SHEATH COLOR



CHARACTERISTICS

It also has a temperature range of -34°C to 105°C, 0.045 inches (1,143 mm) nominal insulation thickness, nominal outer diameter of 0.405 inches (10.287 mm) weighs approximately 115 lbs (52.163 kg).

STANDARDS

UL-style SJTOOW standards



ATTRIBUTES

No. of Cond.	4
Amps	15
Approx	115.00 LBS/MFT (171.13 KG/M)
AWG Size	14
Color Code Chart	12
Cond. Material	Bare Copper
Conductor Stranding	41/30
CSA Type	Approved
Insul. Material	Polyvinylchloride (PVC)
Jacket Material	Polyvinylchloride (PVC)
Max. Temp	105C
Min. Temp	-34C
No. of Strands	41
Nom. Insul. Thick.	0.045 inches (1.143 mm)
Nom. O.D. of Cable	0.405 inches (10.287 mm)
Strand Size	30
UL Style	SJTOOW

HPWC[®]

SJT 16/2

POWER CABLE & PORTABLE CORD



OVERVIEW

Our SJT 16/2 wire is part of our line of power cable and portable service cords. This 16 AWG, 13 AMPS, multi-conductor cable features 26/30 strands, polyvinyl chloride insulation, a PVC jacket, and an overall bare copper conductor material.

SHEATH COLOR



CHARACTERISTICS:

It also has a temperature range of -34°C to 105°C, 0.045 inches (1,143 mm) nominal insulation thickness, Nominal outer diameter of 0.405 inches (10.287 mm) and weighs approximately 50lbs (22.68 kg).

STANDARDS

UL-style SJTOOW standards



ATTRIBUTES

No. of Cond.	2
Amps	13
Approx	50.00 LBS/MFT (74,40 KG/M)
AWG Size	16
Color Code Chart	12
Cond. Material	Bare Copper
Conductor Stranding	26/30
CSA Type	Approved
Insul. Material	Polyvinylchloride (PVC)
Jacket Material	Polyvinylchloride (PVC)
Max. Temp	105C
Min. Temp	-34C
No. of Strands	26
Nom. Insul. Thick.	0.030 inches (0.762 mm)
Nom. O.D. of Cable	0.320 inches (8.128 mm)
Strand Size	30
UL Style	SJTOOW
Voltage	300

HPWC[®]

SJT 16/3

POWER CABLE & PORTABLE CORD



OVERVIEW

Our SJT 16/3 wire is part of our line of power cable and portable service cords. This 16 AWG, 13 AMPS, multi-conductor cable features 26/30 strands, polyvinyl chloride insulation, a PVC jacket, and an overall bare copper conductor material.

CHARACTERISTICS

It also has a temperature range of -34°C to 105°C, a voltage rating of 300V, 0.030 inches (0,762 mm) nominal insulation thickness, nominal outer diameter of 0.330 inches (8.38 mm) and weighs approximately 75 lbs (34.019 kg).



SHEATH COLOR



STANDARDS

UL-style SJTOOW standards

ATTRIBUTES

No. of Cond.	3
Amps	13
Approx	75.00 LBS/MFT (111.61 KG/M)
AWG Size	16
Color Code Chart	12
Cond. Material	Bare Copper
Conductor Stranding	26/30
CSA Type	Approved
Insul. Material	Polyvinylchloride (PVC)
Jacket Material	Polyvinylchloride (PVC)
Max. Temp	105C
Min. Temp	-34C
No. of Strands	26
Nom. Insul. Thick.	0.030 inches (0.762 mm)
Nom. O.D. of Cable	0.330 inches (8.382 mm)
Strand Size	30
UL Style	SJTOOW
Voltage	300

HPWC[®]

SJT 16/4

POWER CABLE & PORTABLE CORD



OVERVIEW

Our SJT 16/4 wire is part of our line of power cable and portable service cords. This 16 AWG, 10 AMPS, multi-conductor cable features 26/30 strands, polyvinyl chloride insulation, a PVC jacket, and an overall bare copper conductor material.

CHARACTERISTICS

It also has a temperature range of -34°C to 105°C, a voltage rating of 300V, 0.030 inches (0,762 mm) nominal insulation thickness, nominal outer diameter of 0.365 inches (9.271 mm) and weighs approximately 85 lbs (38.555 kg).



SHEATH COLOR



STANDARDS

UL-style SJTOOW standards

ATTRIBUTES

No. of Cond.	4
Amps	10
Approx	85.00 LBS/MFT (126.49 KG/M)
AWG Size	16
Color Code Chart	12
Cond. Material	Bare Copper
Conductor Stranding	26/30
CSA Type	Approved
Insul. Material	Polyvinylchloride (PVC)
Jacket Material	Polyvinylchloride (PVC)
Max. Temp	105C
Min. Temp	-34C
No. of Strands	26
Nom. Insul. Thick.	0.030 inches (0.762 mm)
Nom. O.D. of Cable	0.365 inches (9.271 mm)
Strand Size	30
UL Style	SJTOOW

HPWC[®]

SJT 18/2

POWER CABLE & PORTABLE CORD



OVERVIEW

Our SJT 18/2 wire is part of our line of power cable and portable service cords. This 18 AWG, 10 AMPS, multi-conductor cable features 16/30 strands, polyvinyl chloride insulation, a PVC jacket, and an overall bare copper conductor material.

SHEATH COLOR



CHARACTERISTICS

It also has a temperature range of -34°C to 105°C, a voltage rating of 300V, 0.030 inches (0,762 mm) nominal insulation thickness. Nominal outer diameter of 0.302 inches (7.6708 mm) and weighs approximately 50 lbs (22.68 kg).

STANDARDS

UL-style SJTOOW standards



ATTRIBUTES

No. of Cond.	2
Amps	10
Approx	50.00 LBS/MFT (74.40 KG/M)
AWG Size	18
Color Code Chart	12
Cond. Material	Bare Copper
Conductor Stranding	16/30
CSA Type	Approved
Insul. Material	Polyvinylchloride (PVC)
Jacket Material	Polyvinylchloride (PVC)
Max. Temp	105C
Min. Temp	-34C
No. of Strands	16
Nom. Insul. Thick.	0.030 inches (0.762 mm)
Nom. O.D. of Cable	0.302 inches (7.6708 mm) (with Filler) - 0.287 inches (7.2898 mm) (without Filler)
Strand Size	30
UL Style	SJTOOW
Voltage	300

HPWC[®]

SJT 18/3

POWER CABLE & PORTABLE CORD



OVERVIEW

Our SJT 18/3 wire is part of our line of power cable and portable service cords. This 18 AWG, 10 AMPS, multi-conductor cable features 16/30 strands, polyvinyl chloride insulation, a PVC jacket, and an overall bare copper conductor material.

SHEATH COLOR



CHARACTERISTICS

It also has a temperature range of -34°C to 105°C, a voltage rating of 300V, 0.030 inches (0,762 mm) nominal insulation thickness. Nominal outer diameter of 0.315 inches (8.001 mm) and weighs approximately 55 lbs (24.948 kg).

STANDARDS

UL-style SJTOOW standards



ATTRIBUTES

No. of Cond.	3
Amps	10
Approx	55.00 LBS/MFT (81.84 KG/M)
AWG Size	18
Color Code Chart	12
Cond. Material	Bare Copper
Conductor Stranding	16/30
CSA Type	Approved
Insul. Material	Polyvinylchloride (PVC)
Jacket Material	Polyvinylchloride (PVC)
Max. Temp	105C
Min. Temp	-34C
No. of Strands	16
Nom. Insul. Thick.	0.030 inches (0.762mm)
Nom. O.D. of Cable	0.315 inches (8.001mm)
Strand Size	30
UL Style	SJTOOW
Voltage	300

HPWC[®]

SJT 18/4

POWER CABLE & PORTABLE CORD



OVERVIEW

Our SJT 18/4 wire is part of our line of power cable and portable service cords. This 18 AWG, 7 AMPS, multi-conductor cable features 16/30 strands, polyvinyl chloride insulation, a PVC jacket, and an overall bare copper conductor material.

SHEATH COLOR



CHARACTERISTICS

It also has a temperature range of -34°C to 105°C, a voltage rating of 300V, 0.030 inches (0,762 mm) nominal insulation thickness. Nominal outer diameter of 0.340 inches (8.636 mm) and weighs approximately 70 lbs (31.751 kg).


STANDARDS

UL-style SJTOOW standards



ATTRIBUTES

No. of Cond.	4
Amps	7
Approx	70.00 LBS/MFT (104.17 KG/M)
AWG Size	18
Color Code Chart	12
Cond. Material	Bare Copper
Conductor Stranding	16/30
CSA Type	Approved
Insul. Material	Polyvinylchloride (PVC)
Jacket Material	Polyvinylchloride (PVC)
Max. Temp	105C
Min. Temp	-34C
No. of Strands	16
Nom. Insul. Thick.	0.030 inches (0.762 mm)
Nom. O.D. of Cable	0.340 inches (8.636 mm)
Strand Size	30
UL Style	SJTOOW

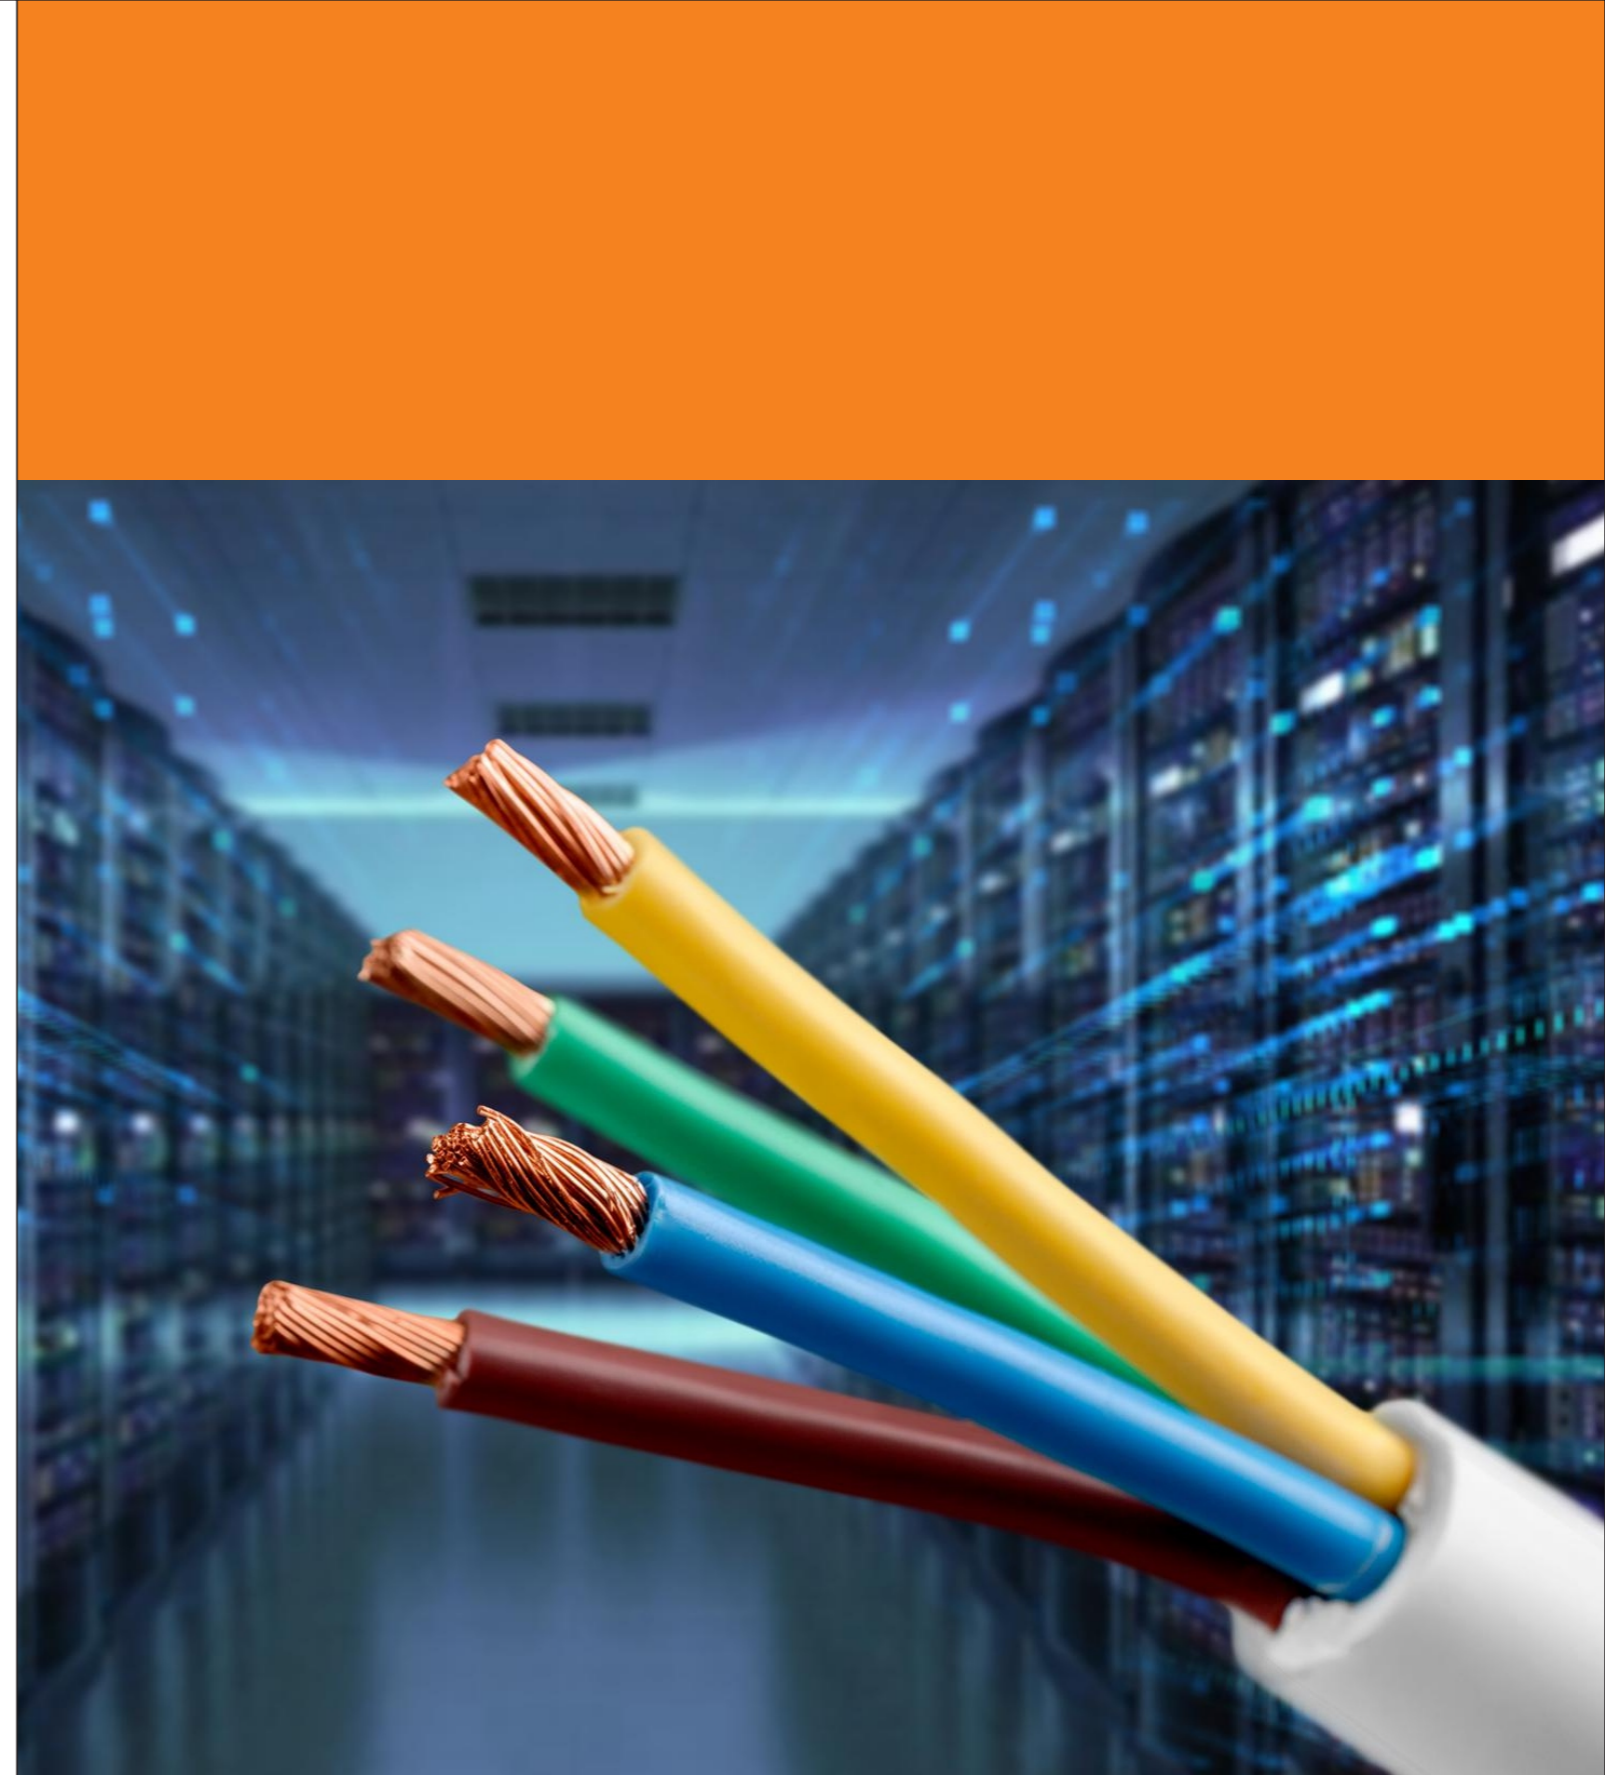

Thank You!

During the process of development, Hoang Phat - HPWC® has gradually become a reliable partner in the electric cable market of many customers.

It can be said that the trust and cooperation of our customers in recent years is the most valuable asset that we have. We deeply appreciate and send our sincere gratitude to all of our customers.

This will be the driving force for us to continue to invest in better production lines to meet all requirements to bring the best values to our customers.

With the belief that efforts, dedication and high sense of responsibility at work will bring greater success in the future, Hoang Phat HPWC's team of leaders, staffs, and employees always keep the spirit and make continuous efforts to become more and more perfect and develop stronger.

We hope to continue to have more opportunities to cooperate with customers in the coming time to create truly valuable and useful works together.

We wish all of you a lot of Health and Success.

HPWC®



HPWC®

CÔNG TY TNHH ĐẦU TƯ PHÁT TRIỂN THƯƠNG MẠI DÂY VÀ CÁP ĐIỆN HOÀNG PHÁT
HOANG PHAT WIRE & CABLE COMPANY CO., LTD

Địa chỉ Nhà máy:
Đường Tân Phước Khánh 09
Phường Bình Chuẩn, Tp. Thuận An
Tỉnh Bình Dương

Điện thoại: 028 5401 0992

Email: kinhdoanh@hpcables.com